UHF MIRCOPHONE BRACKET

TLR742401

SUITED TO:

SUZUKI JIMNY JB74

PRE-INSTALLATION

Read through this installation guide before proceeding.

Fitting time is approx. 10 minutes.

Allen key set
Pointy nose Pliers
Phillips screwdriver

FITTING KIT	
QUANTITY	PART
1	TLR742402
1	M8 x 25 mm SS Button Head Socket – Black
1	M4 SS Washer

NOTE:
This TLR Products UHF Microphone Bracket is designed to mount to the passenger side grab handle of a Suzuki Jimny JB74, using an existing mounting location and does not require any drilling or modification for installation

FITTING INSTRUCTIONS

1. Locate grab handle passenger side of vehicle remove the Alan key bolt by using pointy nose pliers to grip the head of the fake bolt and gently pull it out.
   Note: This is a fake bolt and is a Christmas tree design behind and it will just pull out.
2. Fit the bracket by lining up the folded piece of the bracket with the gap in the dash. The dash material is soft and will allow the bracket to squeeze between each part then line up the bolt hole. Insert M8 bolt. Only hand tighten as the dash is soft
   Note: do not over tighten, as this will crush the grab rail
3. If you have a GME XRS UHF radio you will need to insert supplied small washer spacer between the microphone and the small round clip on the back this will allow adequate space for the mic to fit our bracket.

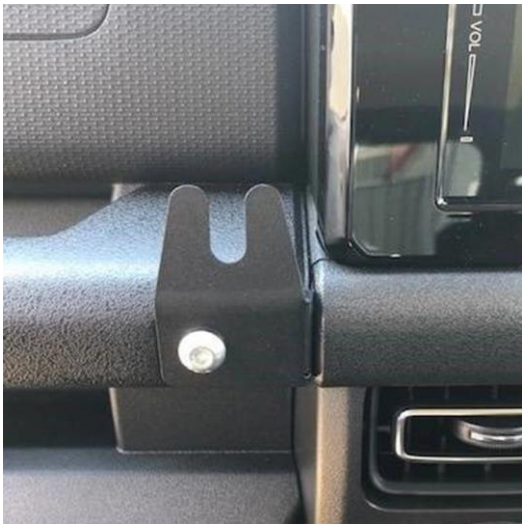

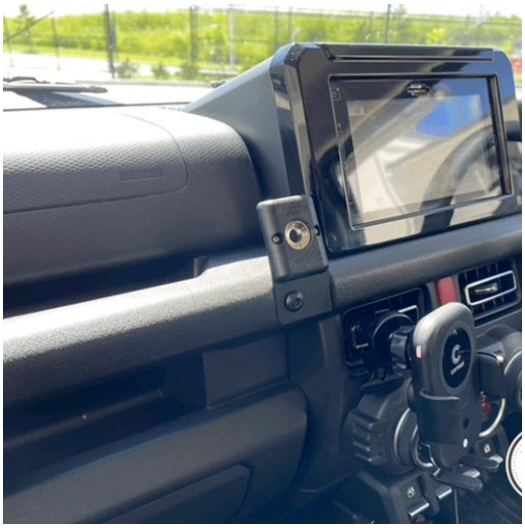

instagram.com/tlrproducts
facebook.com/tlrproducts

hello@tlrproducts.com.au
www.tlrpoducts.com.au

TLR Products
65 Northville Drive
Barnsley NSW 2278