




---

# AIR COMPRESSOR BRACKET ENGINE BAY

---

TLR684602

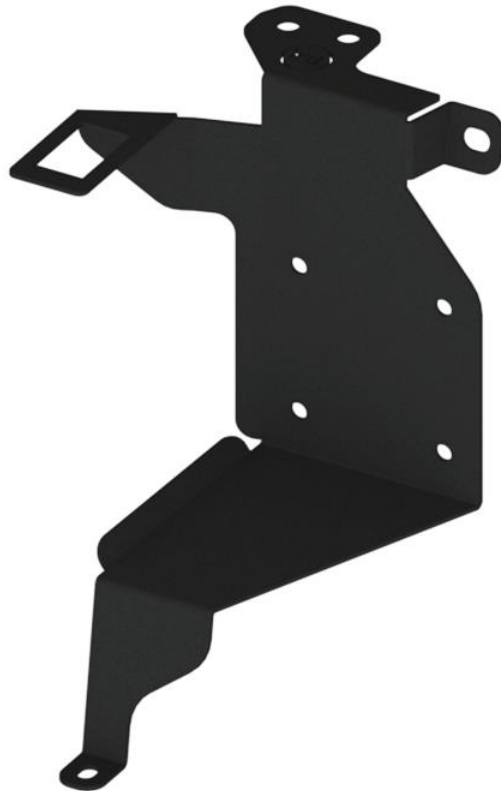

SUITED TO:

**MITSUBISHI TRITON MV SERIES**



# PRE-INSTALLATION



Read through this installation guide before proceeding.



Fitting time is approx. 20 minutes.




Spanner  
Socket Set  
Allen Key Set

FITTING KIT	
QUANTITY	PART
1	TLR684602 – Main Mounting Bracket
3	M8 x 20 mm Button Head Bolt SS
1	M8 Nyloc Nut SS
4	M8 x 17 mm Flat Washer SS
2	M8 Spring Washer SS

## NOTE:




This TLR Products Compressor Bracket locates in the front left corner of the engine bay and accommodates fitment of the ARB Single Air Compressor model CKMA12.

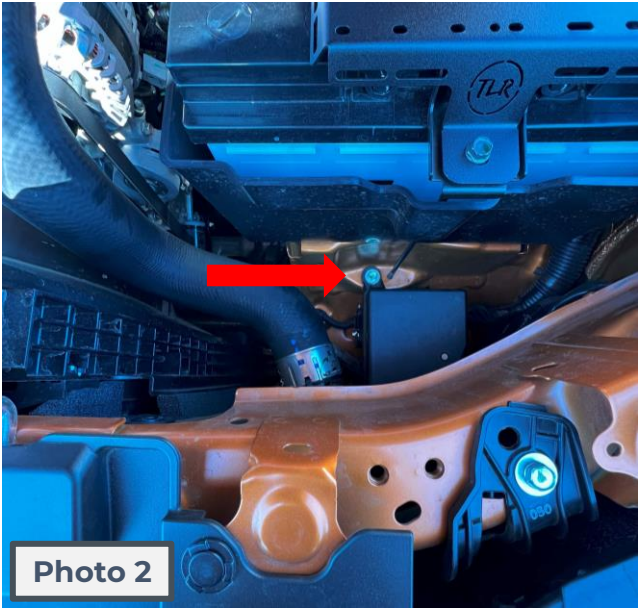



## FITTING INSTRUCTIONS

1. Mount the Air Compressor onto the TLR Products mounting bracket in the orientation shown in **Photo 1**.
2. Remove the M6 relay box mounting bolt shown in **Photo 2**.
3. Position the TLR Products bracket and compressor assembly down over the relay box and align all 3 mounting points, **Refer to Photo 3**.
4. Loosely fit the M8 x 20mm Button Head Bolts including both flat and spring washers into the 2 captive nuts in the upper radiator support **as per Photo 3**.
5. Loosely fit the M8 x 20mm bolt and Nyloc nut into the mounting tab **shown in Photo 3**.
6. Re-Installed the previously remove M6 relay box mounting bolt through the lower mounting leg and securely tighten all hardware to secure mount into place.
7. Install the Outlet Coupling, Pressure Switch and Toggle Switch **as per Photo 4 and 5**.
8. Complete all wiring to finalise installation.

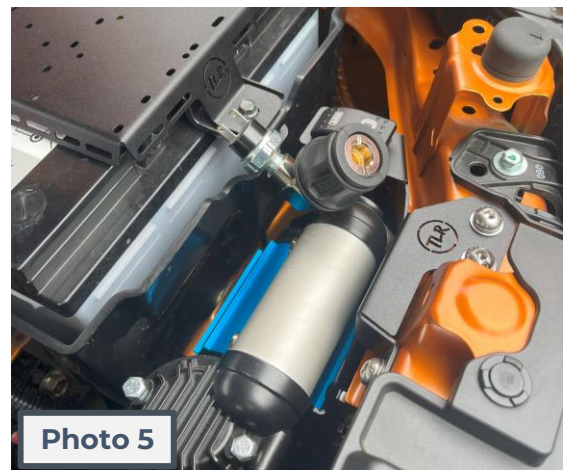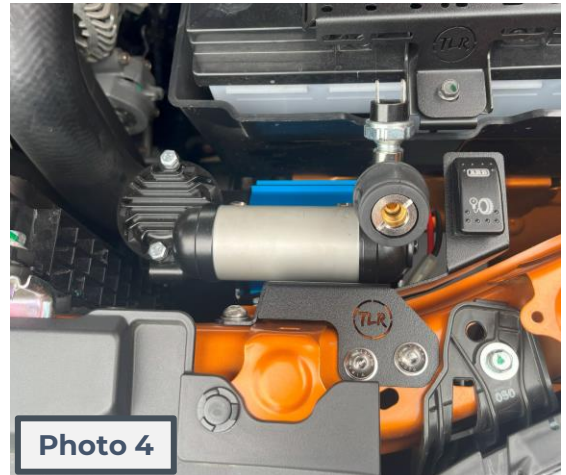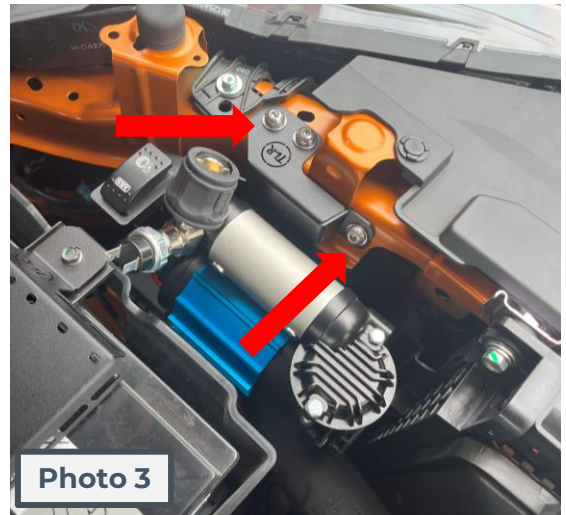

hello@tlrproducts.com.au  
www.tlrproducts.com.au



instagram.com/tlrproducts  
facebook.com/tlrproducts