




FIRE EXTINGUISHER MOUNT DRIVER SIDE

TLR661204

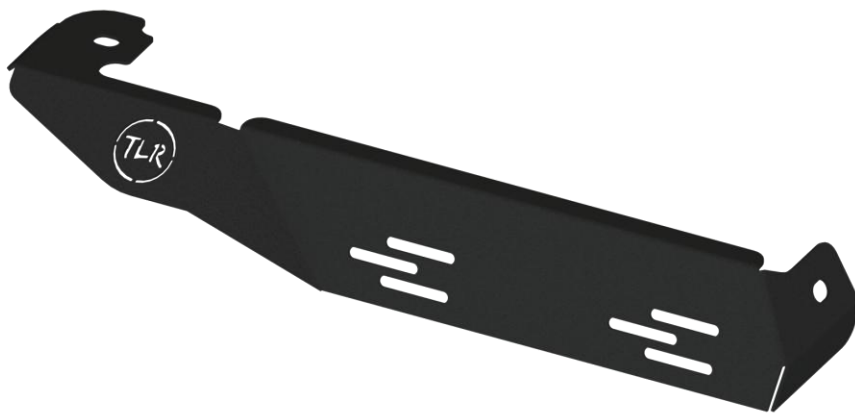

SUITED TO:

**TOYOTA LANDCRUISER 78 SERIES
TROOP CARRIER**



PRE-INSTALLATION



Read through this installation guide before proceeding.



Fitting time is approx. 10 minutes.



Socket Set
Spanner

FITTING KIT	
QUANTITY	PART
1	TLR661204-1 – Fire Extinguisher Mount
1	TLR661203-2 – Plastic Spacer
1	TLR661203-3 – Plastic Spacer
1	M10 x 35 mm 10.9 Tensile Hex Bolt ZP
1	M10 x 21 mm Flat Washer ZP




NOTE:
This TLR Products Fire Extinguisher Mounting Bracket fits to the OEM mounting bolts on the side of the right-hand side front seat.

This mount accommodates most standard 1kg fire extinguishers and also includes mounting provisions for Quick-Fist Mounts or Fire One mounting clips.



FITTING INSTRUCTIONS

1. Mount the Fire Extinguisher of choice to the TLR Products Bracket prior to installation, **See example image on previous page**
2. Remove both Right-hand side front and rear seat mounting bolts and position the thick plastic washer (TLR661203-2) over the rear mounting point. **See Photos 1 and 2**
3. Position the mounting bracket over the seat rail mounts and loosely fit the supplied M10 x 35 mm bolt and flat washer to the rear mounting point.
4. Position the thinner plastic washer (TLR661203-3) between the front seat mount and the extinguisher bracket and install the previously removed OEM mounting bolt.
5. Securely tighten all mounting bolts to complete installation.

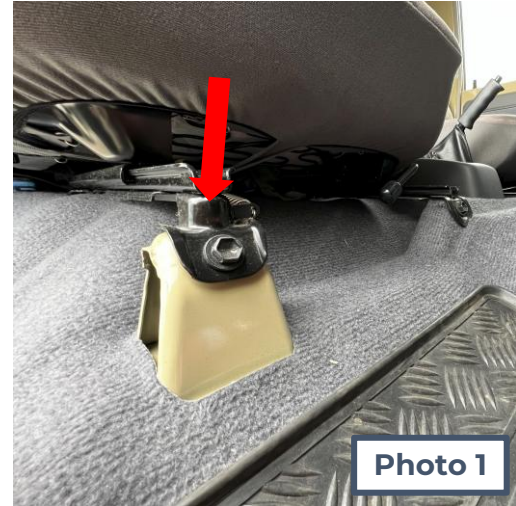

hello@tlrproducts.com.au
www.tlrproducts.com.au



instagram.com/tlrproducts
facebook.com/tlrproducts