




UHF MODULE MOUNT FIREWALL AREA

TLR744605

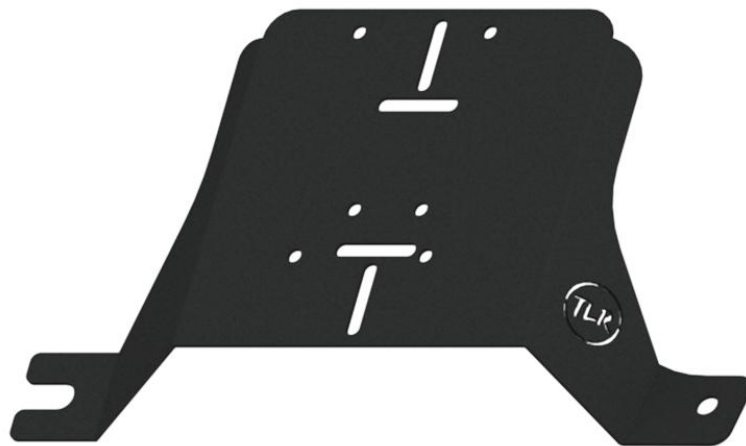

SUITED TO:

**MITSUBISHI TRITON MV SERIES
NISSAN NAVARA D27 SERIES**



PRE-INSTALLATION



Read through this installation guide before proceeding.



Fitting time is approx. 10 minutes.



Spanner
Socket Set
Screwdriver

FITTING KIT	
QUANTITY	PART
1	TLR744605 – Mounting Bracket
4	M4 x 10 mm Phillips Head Bolts
4	M4 Nyloc Nuts

NOTE:
This TLR Products UHF Module mount locates on the firewall above the driver's side footwell, with specific mounting holes to suit the GME 370 and 330 units, along with the ExoXGear EXG3000 and Oricom and Uniden units.



EcoXGear Orientation



GME XRS Orientation



FITTING INSTRUCTIONS

1. Install the UHF Unit of choice to the TLR Products Mounting Bracket using the M4 hardware supplied (*some units include hardware*), **See Photos for example.**
2. Loosen the heater unit mounting nut with enough thread for the mounting leg slide behind, **See Photo 2.**
3. Move the sound deadening material from around the steering column and remove the lower M6 mounting bolt **shown in photo 2.**
4. Position the TLR Products Mounting Bracket assembly by sliding the left mounting tab in between the firewall and plastic mounting leg and align the right-side mounting tab over the M6 column mounting hose, **Refer to Photo 3.**
5. Refit the M6 column mounting bolt and tighten the heat mounting nut to secure the bracket in position.
6. Reposition the sound deadening material around column and complete all wiring to finish installation.



hello@tlrproducts.com.au
www.tlrproducts.com.au



instagram.com/tlrproducts
facebook.com/tlrproducts