




AIR COMPRESSOR BRACKET ARB SINGLE COMPRESSOR KIT

TLR685002

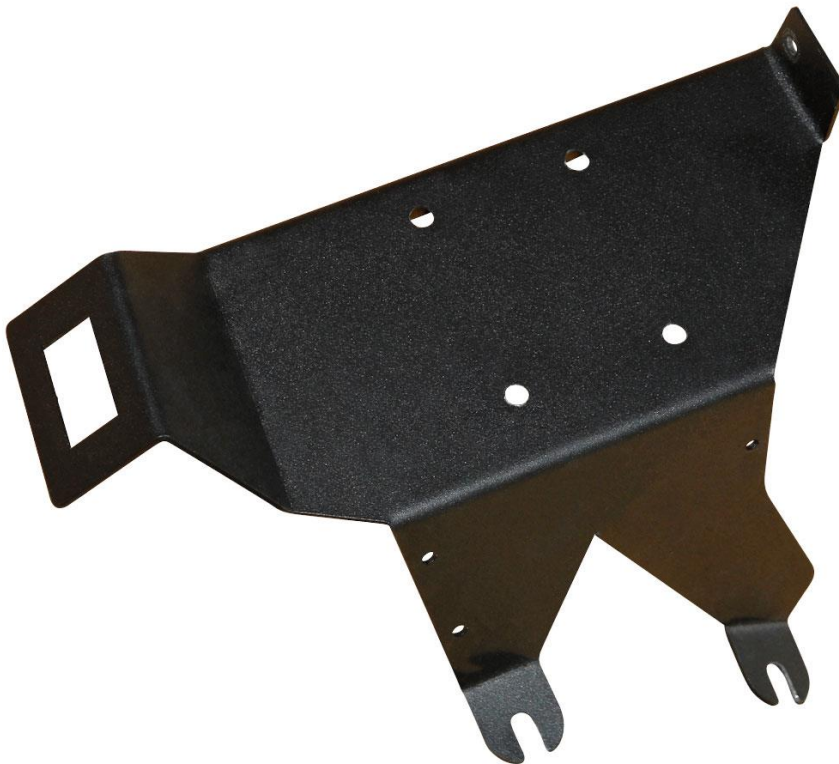

SUITED TO:

**JEEP WRANGLER JL
JEEP GLADIATOR JT**



PRE-INSTALLATION



Read through this installation guide before proceeding.



Fitting time is approx. 30 minutes.



Allen key set
Spanner
Socket Set

FITTING KIT

QUANTITY	PART
1	TLR685001
1	M6 x 12 mm Hex Head Bolt
1	M6 Flat Washer
3	M6 Nyloc Nut
2	M6 Mud Guard Washer
5	Cable tie 150 mm
1	CKMA12 – ARB Single Compressor
1	171302V2 – Pump Up Kit

NOTE:

This Air Compressor Bracket is designed to suit fitment of an ARB Single Air Compressors and locates in the driver's side rear corner of the engine bay of a Jeep Wrangler JL and Gladiator JT series

- Will not fit diesel models
- Compatible with right hand drive models only



FITTING INSTRUCTIONS

1. Mount ARB Air Compressor to the TLR Products Bracket as per **photo 1**
2. Mount relay and switch to positions provided.
3. As per compressor instructions fit the air outlet & pressure switch to compressor as per **photo 1**
4. Connect all wiring as per compressor instructions cable tie behind bracket to make neat.
5. Fit 2 x M6 washers and Nyloc nuts to studs in **photo 2** leave loose so you can place bracket over the studs behind the washers. Remove the two factory nuts on top of firewall.
Note: retain for later use
6. Fit the TLR Products bracket to your vehicle by aligning the two top studs and two lower studs on firewall. **Photo 2**
7. Refit the two factory nuts removed in step 5, tighten all 4 nuts.
8. Check for clearance around brake lines to insure not rubbing.

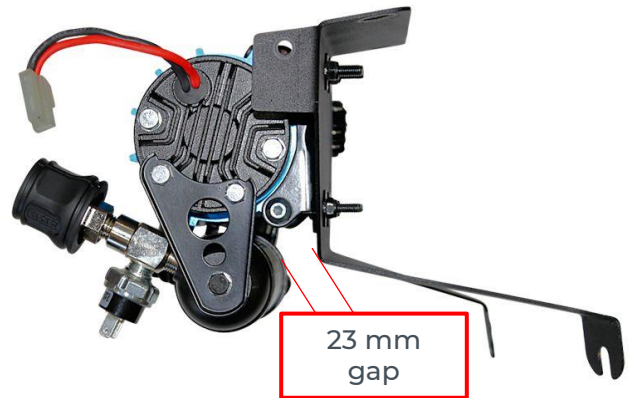


PHOTO 1

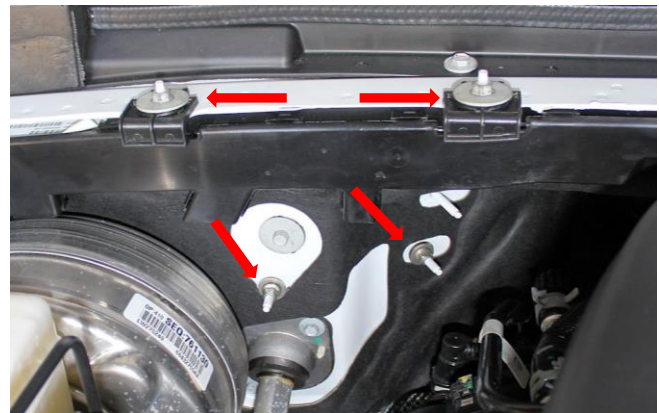


PHOTO 2



[instagram.com/tlrproducts](https://www.instagram.com/tlrproducts)
[facebook.com/tlrproducts](https://www.facebook.com/tlrproducts)



hello@tlrproducts.com.au
www.tlrproducts.com.au



TLR Products
65 Northville Drive
Barnsley NSW 2278